


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

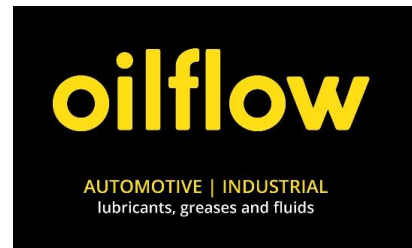

TECHNICAL DATA SHEET FLEETLINE Brake Fluid Dot 3

PRODUCT DESCRIPTION

Fleetline brake fluid dot 3 is a high-quality brake fluid suitable for use in brake and clutch applications in cars, trucks, buses and motorcycles where FMVSS DOT 3 fluids are specified. Do not use in hydraulic, brake systems where DOT 4, DOT 5 or mineral base fluid are specified

PERFORMANCE STANDARDS

- FMVSS NO 166 DOT 3
- SAE J 1703
- ISO 4925 Class 3

BENEFITS

- It is inert and compatible to both natural and synthetic rubber used in brake systems.
- Provides outstanding corrosion protection to all metal components in the braking system.
- It has excellent viscosity behaviour over a wide temperature range ensuring good braking performance.

KEY PROPERTIES

Density @20°C, kg/L	1.05
Boiling point	140
Viscosity @100°C, cSt	1.5min
Flash point °C	80
Ignition temperature, °C	300
pH value	Slightly alkaline
Colour	Straw

PACKAGE SIZE	200 mL	500 mL	5 Litres	20 Litres	210 Litres
Fleetline Brake Fluid DOT 3	✓	✓	✓	✓	✓

