


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

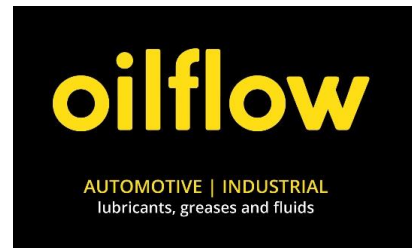

TECHNICAL DATA SHEET

Lube X 15W40 SF CF4

PRODUCT DESCRIPTION

Lube X Turbomax 15W-40 SF/CF-4 is a high quality multigrade mineral engine oil designed for gasoline and diesel engine oil with or without turbochargers. The latest manufacturing technology and a special additive package provide optimum lubricating properties such as engine cleanliness and maximum wear protection. It is especially designed for powerful engines operating in urban driving condition.

PERFORMANCE STANDARDS

- API SF/CF4
- ACEA E2-96,
- MB 228.0,
- MB 228.1,
- MAN 270,
- MAN 271.

BENEFITS

- Provides optimum lubricating properties.
- Good deposit control.
- Extended drain intervals.
- Maximum engine performance.

APPLICATIONS

- Lube X Turbomax 15W-40 SF/CF-4 oil is designed especially for engines in passenger cars, commercial vehicles and engines exposed to high shear stress in stop/start urban driving conditions.



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET

Lube X 15W40 SF CF4

KEY PROPERTIES

Sae grade		15W-40
Density @20 °C	kg/L	0.881
Viscosity @40 °C	cSt	105
Viscosity @100 °C	cSt	13.8
Viscosity Index	N/A	125
Pour point	°C	-24
TBN	mg KOH/g	10

PACKAGE SIZE	500ml	5 Litres	20 Litres	210 Litres	1000 Litres
SAE 15W40 SF CF4	✓	✓	✓	✓	✓

