


PO Box 14527, Wadeville 1422  
562 Crocker Road  
Wadeville, Johannesburg

Tel: (011) 827-5848  
Fax: (011) 827-5832  
E-mail: [oilflow@oilflow.co.za](mailto:oilflow@oilflow.co.za)  
[www.oilflow.co.za](http://www.oilflow.co.za)

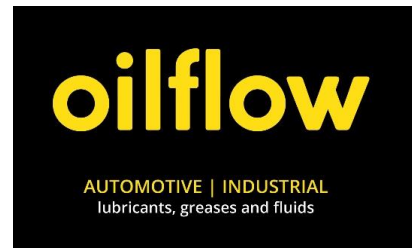

## TECHNICAL DATA SHEET

### Fleetline Power Steering Fluid

---

#### PRODUCT DESCRIPTION

Power steering fluid is meant for central power steering units, hydraulic and levelling systems, hydrostatic transmission and every shock absorber on passenger cars, light commercial and industrial vehicles. It is blended using highly refined GRII base oils fortified with anti-oxidant, anti-foam, anti-corrosion and viscosity index improvers together with friction modifiers to ensure high levels of performance and long service life. This fluid is recommended by several car manufacturers.

#### PERFORMANCE STANDARDS

- DEXRON IIIH
- DEXRON IIIG
- DEXRON IIIF
- FORD MERCON
- ALLISON C-4, ALLISON TES 389
- CATERPILLAR TO-2
- MB 236.1
- ZF-TE-ML 09/11/14
- VOITH H 55.6336.41
- VOITH G.607
- M2C138-CJ, M2C166-H

#### BENEFITS

- Gives excellent performance and long service life.
- Compatible with elastomers.
- Guards against gear wear, rust and deposit formation.
- Smooth gear change and improves power.
- All season service life.



PO Box 14527, Wadeville 1422  
562 Crocker Road  
Wadeville, Johannesburg

Tel: (011) 827-5848  
Fax: (011) 827-5832  
E-mail: [oilflow@oilflow.co.za](mailto:oilflow@oilflow.co.za)  
[www.oilflow.co.za](http://www.oilflow.co.za)



## TECHNICAL DATA SHEET

### Fleetline Power Steering Fluid

---

#### KEY PROPERTIES

Appearance	Visual	Red
Density @20 °C	kg/L	0.864
Viscosity @40 °C	cSt	40
Viscosity @100 °C	cSt	7
Viscosity Index		142
Pour point	°C	-45
Flash point C.O.C.	°C	>200

