


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

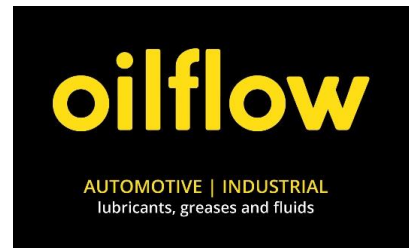

TECHNICAL DATA SHEET

Fleetline EP 75W90 GL4

PRODUCT DESCRIPTION

Fleetline EP 75W-90 semi synthetic gear oil is designed as a multipurpose lubricant formulated using selected base stocks and a complex extreme pressure additive for a wide range of applications from manual transmission to final drives operating in robust conditions and in highly stressed power trains. It is recommended for Ford high speed and other multi-speed gearboxes such as Opel (Delta Motors), Nissan and Mazda 323 gear boxes to overcome problems associated with cold temperature gear selection and high temperature gear selection. It is compatible with SAE 80W-90 and can be used for topping-up wherever an SAE 80W/90 has been specified.

PERFORMANCE STANDARDS

- API: GL4
- Ford: M2C-175A
- MIL: 2105D
- ZF TE ML 02B

BENEFITS

- High viscosity index and suitable in a wide temperature range.
- Excellent anti-wear and extreme pressure performance.
- Excellent rust and corrosion protection.
- Fully compatible with conventional gear oils.
- Excellent thermal stability, lubricity, and fluidity.

KEY PROPERTIES

Density @20 °C	Kg/L	0.878
Viscosity @40 °C	cSt	105
Viscosity @100 °C	cSt	14.5
Viscosity Index	N/A	140
Flash point	°C	215
Pour point	°C	-36



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET

Fleetline EP 75W90 GL4

PACKAGE SIZE	500ml	5 Litres	20 Litres	210 Litres
EP 75W-90 GL4	✓	✓	✓	✓

