


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

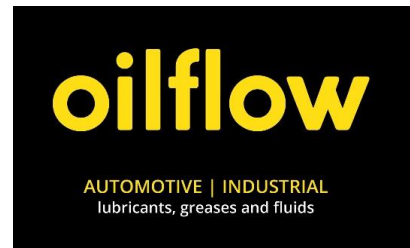

TECHNICAL DATA SHEET

Fleetline EP 85W140 GL5 Limited Slip

PRODUCT DESCRIPTION

EP 85W-140 GL5 limited slip is a high quality, hypoid type gear oil, specially developed for limited slip differential fitted to modern high performance passenger cars and off-road leisure vehicles. It may be used in limited slip differentials and is equally suitable for use in transmissions, gear axles, steering boxes and universal joints.

PERFORMANCE STANDARDS

- API GL5 LTD LS
- ZF TE ML05C

BENEFITS

- Gives maximum protection of gears, bearings, and limited slip components.
- Corrosion and rust inhibition.
- Effective in reducing transmission noise.
- Good performance at high temperatures.

KEY PROPERTIES

SAE grade		85W-140
Viscosity@ 40°C	cSt	350
Viscosity @100°C	cSt	26
Viscosity Index	N/A	100
Pour point	°C	-18
Flash point	°C	230

PACKAGE SIZE	5 Litres	20 Litres	210 Litres
EP 85W-140 GL5 LS	✓	✓	✓

