


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

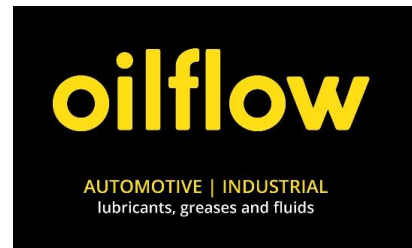

TECHNICAL DATA SHEET

Fleetline 10W40 SL CF Semi Synthetic

PRODUCT DESCRIPTION

Fleetline 10W-40 SL CF is a semi synthetic engine oil blended from synthetic base stocks mixed with the upgraded Gr II and premium additives that enhances the detergency and dispersancy action, preventing harmful deposits build up and keeping engine clean. The oil is fortified with viscosity modifiers that help with fluidity and stay in grade even at low and high temperatures. The oil is recommended for passenger petrol cars, both light duty or commercial petrol and diesel trucks.

PERFORMANCE STANDARDS

API SL/CF

ACEA A3/B4

MB 229.5

VW 501.01/505

BENEFITS

- Increased fuel economy.
- Extended engine durability.
- Excellent protection against sludge deposit.
- Reduced maintenance cost.
- Improved engine efficiency.
- Less down time.



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET

Fleetline 10W40 SL CF Semi Synthetic

KEY PROPERTIES

SAE Grade		10W-40
DENSITY @20 °C	Kg/L	0.875
VISCOSITY@40 °C	cSt	100
VISCOSITY@100 °C	cSt	14.6
VISCOSITY INDEX		155
POUR POINT	°C	-30
FLASH POINT	°C	>200

PACKAGE SIZE	500 ml	5 Litres	20 Litres	210 Litres
10W-40 SL CF	✓	✓	✓	✓

