


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

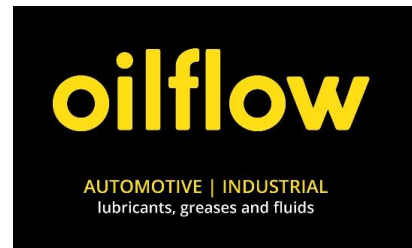

TECHNICAL DATA SHEET

Fleetline SAE 10W SF CF4

PRODUCT DESCRIPTION

High quality monograde SF/CF-4 10W for hydraulic applications blended from virgin base oils, which have been fortified with performance additives to meet the API SF/CF-4 specification.

PERFORMANCE STANDARDS

- API SF/CF-4
- API CF-2 and CF requirements

APPLICATION

- The product is suitable for use in farming, mining and construction equipment's requiring the use of a thin grade oil and can also be used in hydraulic systems (tippers, auxiliary equipment etc.).
- It is particularly useful in equipment's such as generators that requires the use of low ash forming oils. The low ash content reduces gum and varnish deposit and helps keep intakes clear.
- SAE 10W is recommended for use in older diesel and petrol engines and in off road commercial equipment's.
- Suitable for manual and power shift transmission.

BENEFITS

- High power output
- Long engine life
- Saves on inventory costs
- Long oil drain intervals



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848

Fax: (011) 827-5832

E-mail: oilflow@oilflow.co.za

www.oilflow.co.za



TECHNICAL DATA SHEET

Fleetline SAE 10W SF CF4

KEY PROPERTIES

Density @20 °C	kg/L	0.865
Viscosity @40 °C	cSt	45
Viscosity @100 °C	cSt	7
Viscosity Index		110
Pour point	°C	-30
TBN	mg KOH/g	10

PACKAGE SIZE	1 Litres	5 Litres	20 Litres	210 Litres
SAE 10W SF CF4	✓	✓	✓	✓

