


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

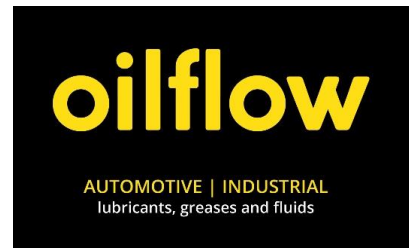

TECHNICAL DATA SHEET

Fleetline 5W40 Full Synthetic

PRODUCT DESCRIPTION

Full synthetic top tier motor oil which meets the requirements of the distinguished manufactures of vehicles and machines. The oil meets the requirements of the ACEA C3 category which makes it possible to be used in passenger cars complying with Euro4 standard. It is primarily intended for use in diesel engines with injection system based on unit injector. It is widely used in passenger cars and light commercial vehicle in adverse and normal conditions.

PERFORMANCE STANDARDS

- API SM/CF
- ACEA A3/B4
- VW 500 00/502 00/505 00,
- Mercedes Benz 229.3
- BMW Longlife-04
- Porsche C30

BENEFITS

- Provides optimum lubricating properties.
- Good deposit control.
- Extended millage between drain intervals.
- Maximum engine performance.
- Reduces fuel and oil consumption.
- Protects the environment – Reduced emissions.

KEY PROPERTIES

SAE GRADE		5W-40
Density @20 °C	kg/L	0.865
Viscosity @40 °C	cSt	85
Viscosity @100 °C	cSt	14.3
Viscosity Index	N/A	160



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET Fleetline 5W40 Full Synthetic

Pour point	°C	-30
TBN	mg KOH/g	10

PACKAGE SIZE	500 mL	1 Litre	5 Litres	20 Litres	210 Litres
SAE 5W40 SM CF	✓	✓	✓	✓	✓

