


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

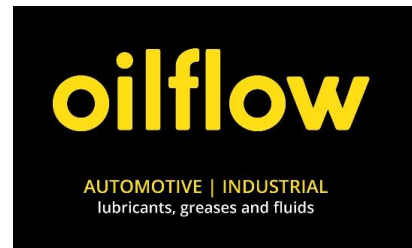

TECHNICAL DATA SHEET Fleetline Two Stroke TWC

PRODUCT DESCRIPTION

Fleetline Two Stroke oil is a lubricating oil for two stroke motorcycles, lawn mowers, chain saws and trimmers. It is non ash forming thus exhibiting excellent anti wear properties. It is pre-blended as an SAE 40 and thinned using a dissolvent for easy mixing. It is blended from the selected base stocks and incorporates a special polybutene to stop the smoke during 2 stroke engine operation.

PERFORMANCE STANDARDS

- API TC
- JASO FC
- ISO EGC
- TISI 1040

BENEFITS

- Strong detergent performance.
- Low smoke operation.
- Prevents plug fouling and piston crown deposit.
- Prevents ring sticking.
- Protect against rust, wear and corrosion.
- Lubricates even at high speeds.

APPLICATION

Always refer to the equipment manufacturer's manual to check the recommended oil/fuel ratio, but as a general guide 1:20 oil /fuel ratio is suitable.



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET

Fleetline Two Stroke TWC

KEY PROPERTIES

Viscosity 40 °C	cSt	42
Viscosity 100 °C	cSt	7
Viscosity index	N/A	122
Flash point	°C	90
colour	N/A	Blue

PACKAGE SIZE	200 mL	500 mL	1 Litre	5 Litres	20 Litres	210 Litres
Fleetline Two Stroke	✓	✓	✓	✓	✓	✓

