


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

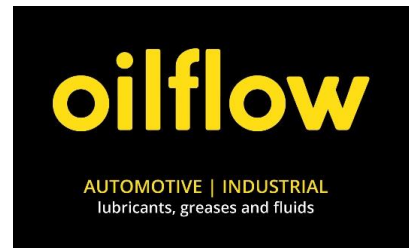

TECHNICAL DATA SHEET

Fleetline Hydraulic UHVI 32.46. 68.100

PRODUCT DESCRIPTION

Hydraulic UHVI is a range of premium quality anti-wear hydraulic oils blended from virgin base oils and contain anti-wear, anti-rust, anti-oxidant and anti-foam additives to give excellent performance and wear protection. In addition, it contains a viscosity index improver to lessen the impact of high operating temperatures.

PERFORMANCE STANDARDS

- Rex roth
- Good corrosion protection
- Effective anti-wear properties
- Long equipment life
- Excellent oxidation resistance
- Excellent temperature/viscosity performance
- DIN 51524 Part 3
- Denison HF-0
- Vickers M-2950 S (Mobile Systems)
- M -1286 S (Industrial Systems)

APPLICATIONS

It is recommended for use in all kind of hydraulic systems where zinc containing anti-wear hydraulic oil is called for especially those running at higher than normal temperatures and pressure (limits as indicated by the OEM). It should not be used in a system, which contains silver plated components.

KEY PROPERTIES

ISO Grade	32	46	68	100
Viscosity @ 40°C	32	46	68	100
Viscosity @ 100°C	7.2	7.6	10	13.5
Viscosity Index	160	160	160	160
Density @20°C	0.865	0.875	0.878	0.880



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za



TECHNICAL DATA SHEET

Fleetline Hydraulic UHVI 32.46. 68.100

Flash Point	210	215	220	230
Pour point	-42	-39	-36	-36

PACKAGE SIZE	20 Litres	210 Litres
Hydraulic UHVI Oils	✓	✓

