


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

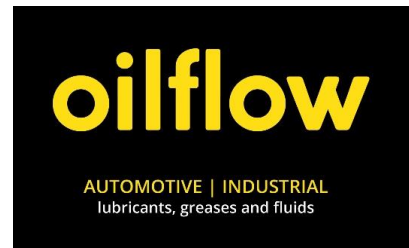

TECHNICAL DATA SHEET INDUSTRIAL GEAR OIL 150, 220,320, 460

PRODUCT DESCRIPTION

High performance mineral oils for enclosed industrial gears formulated with a sulphur-phosphorus additive package with excellent extreme-pressure and anti-wear properties.

PERFORMANCE STANDARDS

- U.S. steel 224
- DIN 51517 Part 3 ⇒ group CLP
- ISO 12925-1 CKD
- AGMA 9005 - D94 EP
- AGMA 250.04.
- Cincinnati Milacron
- David Brown gear

APPLICATIONS


Spur, bevel, helical, bearing and couplings, worm and industrial Hypoid gear cases and industrial type reduction gearboxes.

TYPICAL PHYSICAL CHARACTERISTICS	ISO 150	ISO 220	ISO 320	ISO 460
AGMA Grade	4EP	5EP	6EP	7EP
David Brown Grade	4E	5E	6E	7EP
Colour ASTM	4	>6	7	7
Channel point	-26	-18	-10	-8
Density @ 20°C, KG/L	0.895	0.904	0.911	0.920
Flash point COC, °C	246	256	270	280



PO Box 14527, Wadeville 1422
 562 Crocker Road
 Wadeville, Johannesburg

Tel: (011) 827-5848
 Fax: (011) 827-5832
 E-mail: oilflow@oilflow.co.za
 www.oilflow.co.za

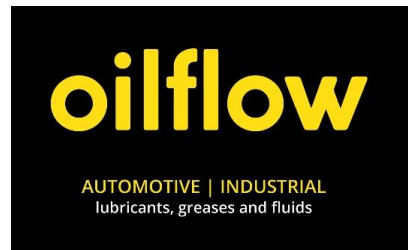

TECHNICAL DATA SHEET INDUSTRIAL GEAR OIL 150, 220,320, 460

Fire point COC, °C	264	268	286	300
FZG test	12.0	12.0	12.0	12
Test SEQ 2 TEND/STAB	0/0	0/0	0/0	0/0
Pour point	-24	-21	-15	-12
Timken OK Load, KG	27	27	27	27
Viscosity Kinematic				
Cst @ 40°C	150	220	320	460
Cst a 100°C	14.1	18.1	21.7	28
Viscosity Index	96	93	90	90

PACKAGE SIZE	20 Litres	210 Litres
Industrial Gear Oils	✓	✓

