


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

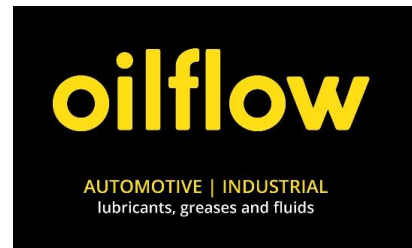

TECHNICAL DATA SHEET Fleetline Mould Release

PRODUCT DESCRIPTION

Mould release is a general-purpose ready to use mould release fluid. It should be applied neat or 50:50 by spray or brush for the release of concrete moulds such as those used in the construction of formwork where clay bricks, roof tiles or paver products are being manufactured.

BENEFITS

- Excellent surface finish
- Good corrosion protection to moulds
- Easy wetting properties
- Non-staining
- Low volatility

APPLICATIONS

Mould release is suitable for use in all operations when a general-purpose mould release fluid is required. It can be used in a wide variety of applications such as the construction of concrete using metal shutters and it can be applied by brush, swab or spray. It then adheres to the steel mould and prevent surface corrosion (preventing discolouration) giving a smooth, stain free finish and the formwork separates easily and remains rust free on standing.

KEY PROPERTIES

Colour	Amber
Mixes with water	Yes
Viscosity @40°C	18cSt
Density @ 20°C	0.880

PACKAGE SIZE	20 Litres	210 Litres	1000 Litres
Mould release	✓	✓	✓

