


PO Box 14527, Wadeville 1422  
562 Crocker Road  
Wadeville, Johannesburg

Tel: (011) 827-5848  
Fax: (011) 827-5832  
E-mail: oilflow@oilflow.co.za  
www.oilflow.co.za

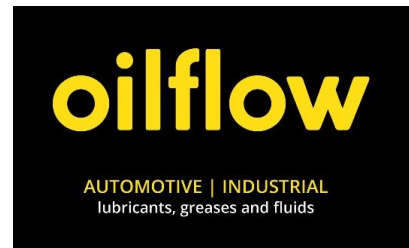

## TECHNICAL DATA SHEET

### Fleetline Syncool B

#### PRODUCT DESCRIPTION

SYNCOOL B is a fully synthetic, high performance nitrite-free phenolic free, biostable soluble oil. It contains emulsifiers, corrosion inhibitors, extreme pressure, foam suppressants and other functional additives to impart the necessary performance and principally designed for use in water-extendible applications. (up to 600ppm hard water)

#### METHOD OF USE

1:10 – 1:50 maximum dilution rate.

#### QUALIFICATIONS

SYNCOOL B can be used on ferrous and non-ferrous metals in a wide variety of applications.

#### APPLICATION

In general, product can be used in all metal removal operations for cooling purpose and in machine tool lubrication.

Aluminum and its alloys	-	1:20	Free cutting steels	-	1:50
Cast irons	-	1:20	Cutting non-ferrous	-	1:30

#### KEY PROPERTIES

Appearance	Blue
Solubility in water	Soluble
Density	1.08

PACKAGE SIZE	5 Litres	20 Litres	210 Litres
Syncool B	✓	✓	✓

