


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

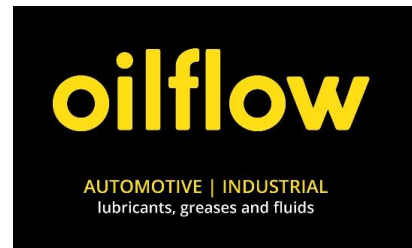

TECHNICAL DATA SHEET

Fleetline Transmission TO4 10W, 30, 40,50

PRODUCT DESCRIPTION

Fleetline Transmission combines superior additive technology with virgin base stocks. It is formulated for use in Caterpillar and Komatsu equipment which specify TO4 transmission qualified oils. Fleetline Transmission provides superior gear protection and excellent thermal stability. It maintains a delicate balance of static and dynamic friction characteristics with a variety of materials, which improves load carrying capacity and durability and reduces brake chatter. As a result, Fleetline Transmission improves performance and provides longer component life.

STANDARD PERFORMANCE

- GL-4
- Allison C4
- Allison TES 439
- Caterpillar T0-2
- Caterpillar TO4, TO-4M
- Eaton fuller
- Euclid
- Kumatsu KES 07.868.1
- Sperry Vickers /Eaton: M29 SOS
- Sperry Vickers/ Eaton 1280-S
- DANA (where TO4 is called for)


APPLICATION

Fleetline Transmission is recommended for the lubrication of heavy-duty equipment in both highway and off highway service that require a lubricant meeting the Caterpillar TO-4 and Allison C-4 specifications. Fleetline Transmission provides excellent service to all Caterpillar powershift transmissions, final drives, hydrostatic transmissions, torque converters, as well as drive trains recommending Allisons C-4 qualified oils.



PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

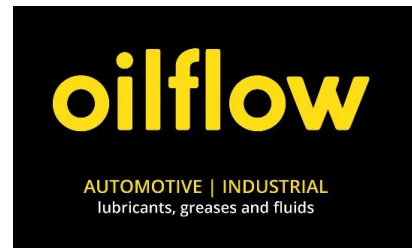

TECHNICAL DATA SHEET

Fleetline Transmission TO4 10W, 30, 40,50

BENEFITS

- Excellent gear wear protection
- Extends component life
- Excellent thermal stability
- Excellent frictional characteristics
- Outstanding cleanliness
- Excellent protection against rust and corrosion
- Strong extreme pressure performance

KEY PROPERTIES

SAE GRADE	10W	30	40	50
Viscosity @40°C	40	110	145	225
Viscosity @100°C	6.2	11.7	14.6	19
Viscosity Index	100	94	100	95
Flash point	210	220	230	240
Pour point	-27	-21	-12	-9
Specific gravity (kg/L)	0.876	0.884	0.890	0.895
Total base number (mg KOH/g)	10.5	10.5	10.5	10.5

PACKAGE SIZE	20 Litres	210 Litres
Fleetline Transmission Oil	✓	✓

