


PO Box 14527, Wadeville 1422
562 Crocker Road
Wadeville, Johannesburg

Tel: (011) 827-5848
Fax: (011) 827-5832
E-mail: oilflow@oilflow.co.za
www.oilflow.co.za

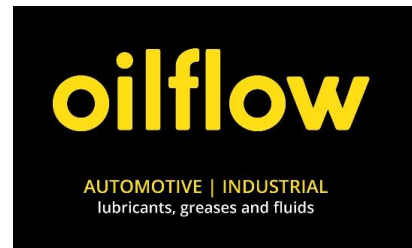

TECHNICAL DATA SHEET

Fleetline Fifth Wheel Grease

PRODUCT DESCRIPTION

Fifth Wheel Grease is a tacky extreme pressure grease giving excellent water repelling properties and in combination with a high viscosity base oil fortified with molybdenum, enhances lubricity and load carrying capacity.

APPLICATION

Fifth Wheel Grease has been specially developed for applications where the combination of heavy loads, slow speeds, water washout and sliding surfaces exclude the use of conventional products. These conditions are found with heavy truck fifth wheels.

KEY PROPERTIES

Thickening agent	Lithium / Calcium/ Polymer
Colour	Grey/ Black
NLGI Classification	2
Worked Penetration @ 25°C	280
Drop point °C	195
Timken OK Load Kg	>25
Oil Viscosity @ 40°C cSt	860
Water Washout	0.2%

PACKAGE SIZE	5 kg	15kg
Fifth Wheel Grease	✓	✓

